





ME 425
MANITOU





ME 425
MANITOU

UNIVERSAL
CONCEPT
18102 05100
www.manitou.com

Ersatzteile & Wartung

DU

MANITOU










HOPPECKE



Typ
Type
Type

5 HPZS 700

Nennspannung
Tension nominale
Nominale spanning

48 Volt

Batterie - Nr.
Battery - no.
Batterij nr.

07TB320631 - 26

Kapazität
Capacité
Capaciteit

C₅ 700 Ah

Trog - Nr.
Coffre - no.
Koffer nr.

51777

Zellenzahl
Nombre d'éléments
Aantal cellen

24

Lieferdatum
Date
Leveringsdatum

04.06.07

Gewicht
Poids
Gewicht

1155 KG

S. O. S 0148 17 00 02

Zellenprotokoll Maschinen Type ME412 Seriennummer 851626

Batterie 48 Volt Baujahr 07

| | | | | | | | | |
|--------|------|------|------|------|------|------|------|------|
| Volt | 2,18 | 2,17 | 2,16 | 2,14 | 2,10 | 2,15 | 2,16 | 2,17 |
| Dichte | 1,28 | 1,28 | 1,26 | 1,28 | 1,28 | 1,28 | 1,28 | 1,28 |
| Volt | 2,16 | 2,17 | 2,17 | 2,15 | 2,12 | 2,15 | 2,16 | 2,16 |
| Dichte | 1,28 | 1,28 | 1,28 | 1,28 | 1,26 | 1,26 | 1,28 | 1,26 |
| Volt | 2,16 | 2,16 | 2,13 | 2,15 | 2,12 | 2,16 | 2,15 | 2,13 |
| Dichte | 1,26 | 1,28 | 1,28 | 1,28 | 1,28 | 1,28 | 1,28 | 1,24 |
| Volt | | | | | | | | |
| Dichte | | | | | | | | |
| Volt | | | | | | | | |
| Dichte | | | | | | | | |
| Volt | | | | | | | | |
| Dichte | | | | | | | | |

Datum 5.6.14

Techniker M. Schmidt

KEYON TIME 10:23 H



BAT% 75



CAPACITE NOMINALE
RATED CAPACITY
NENNKAPAZITÄT
CAPACIDAD NOMINAL
CAPACITÀ NOMINALE

2500

kg

CAPACITES EFFECTIVES
ACTUAL CAPACITIES
EFFEKTIVE KAPAZITÄT
CAPACIDAD EFECTIVA
CAPACITÀ EFFETTIVA

SUIVANT NORME EN 1726-1 (199 1074)

1 - Jusqu'à hauteur de levée

Up to height of

Bis zur hubhöhe

Hasta altura de elevación

Sino ad altezza di sollevamento

4000

mm

2 - Pour hauteur maximale de

For maximum height of

Für maximale Höhe


Para altura máxima de

Per altezza massima di

6000

mm

MAT VERTICAL
VERTICAL MAST
VERTIKALER MAST
MASTIL VERTICAL
RAMPA VERTICALE

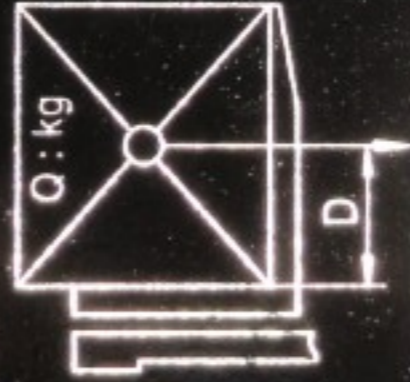

2350

1470

2135

1220

1104

745

500

600

1100

D : mm

EQUIPMENT
ATTACHMENT
ZUBEHÖR
EQUIPO
ATTREZZATURA




CAPACITES EFFECTIVES
ACTUAL CAPACITIES
EFFEKTIVE KAPAZITÄT
CAPACIDAD EFECTIVA
CAPACITÀ EFFETTIVA


1

2

258249

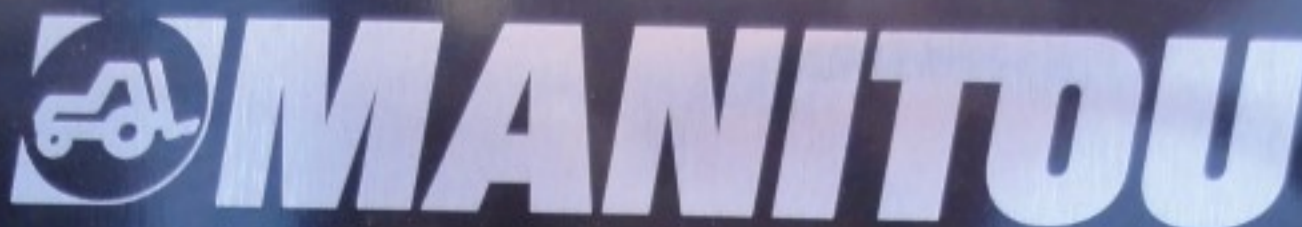

Made by HMME for MANITOU BF
44158 ANCENIS CEDEX FRANCE



MODELE
MODEL

MODELLO
MODELO

SERIE
SERIES

SERIE
SERIE

ME 425

S1

N° de série
Serial Nr

Numero di serie
Número de serie

Année de fabrication
Year of manufacture
Anno di fabbricazione
Año de fabricacion

851626

2010

Tension nominale
Nominal Voltage
Tensione nominale
Tensión nominal

Numéro d'homologation
Homologation number
Numero d'omologazione
Contraseña homologacion

48

V

JP250070412321

Poids sans la batterie
Weight excluding battery
Peso senza la batteria
Peso sin la batería

Poids de la batterie minimum
Minimum weight of the battery
Peso della batteria minima
Peso de la batería mínima

3620

kg

1050

kg

Pression des pneumatiques (Bar)
Tyre pressure (Bar)
Pressione per pneumatici (Bar)
Presion de los neumáticos (Bar)

Poids de la batterie maximum
Maximum weight of the battery
Peso della batteria massima
Peso de la batería máxima

Avant
Front

Anteriore
Adelante

Arrière
Rear

Posteriore
Trasero



1210

kg

N°283693