










MANITOU






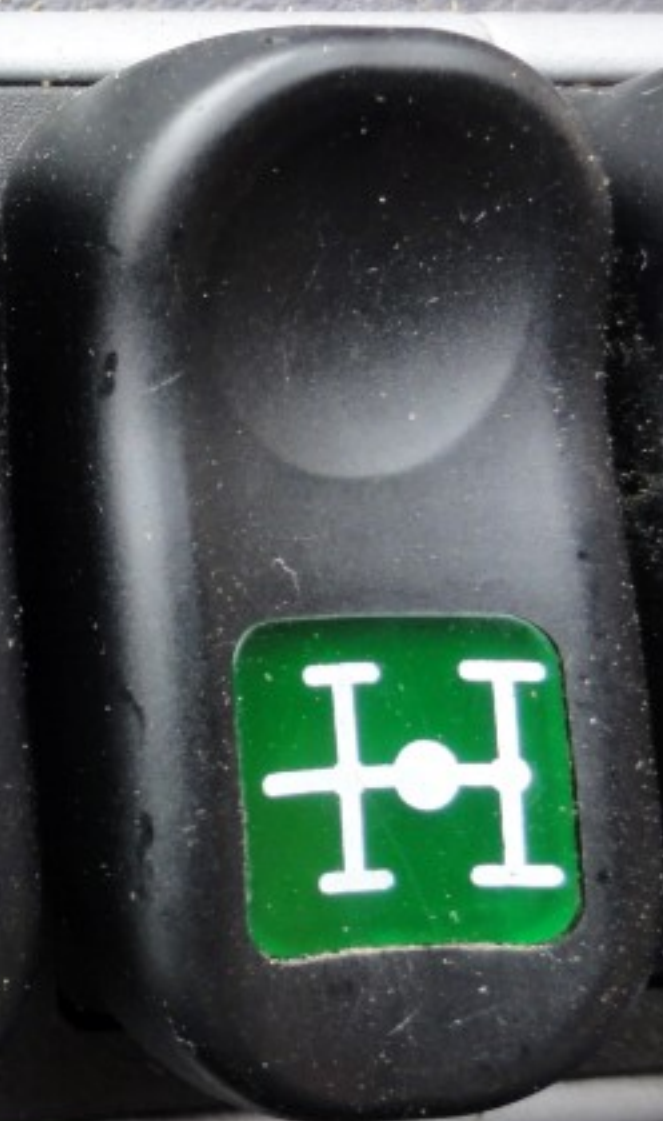





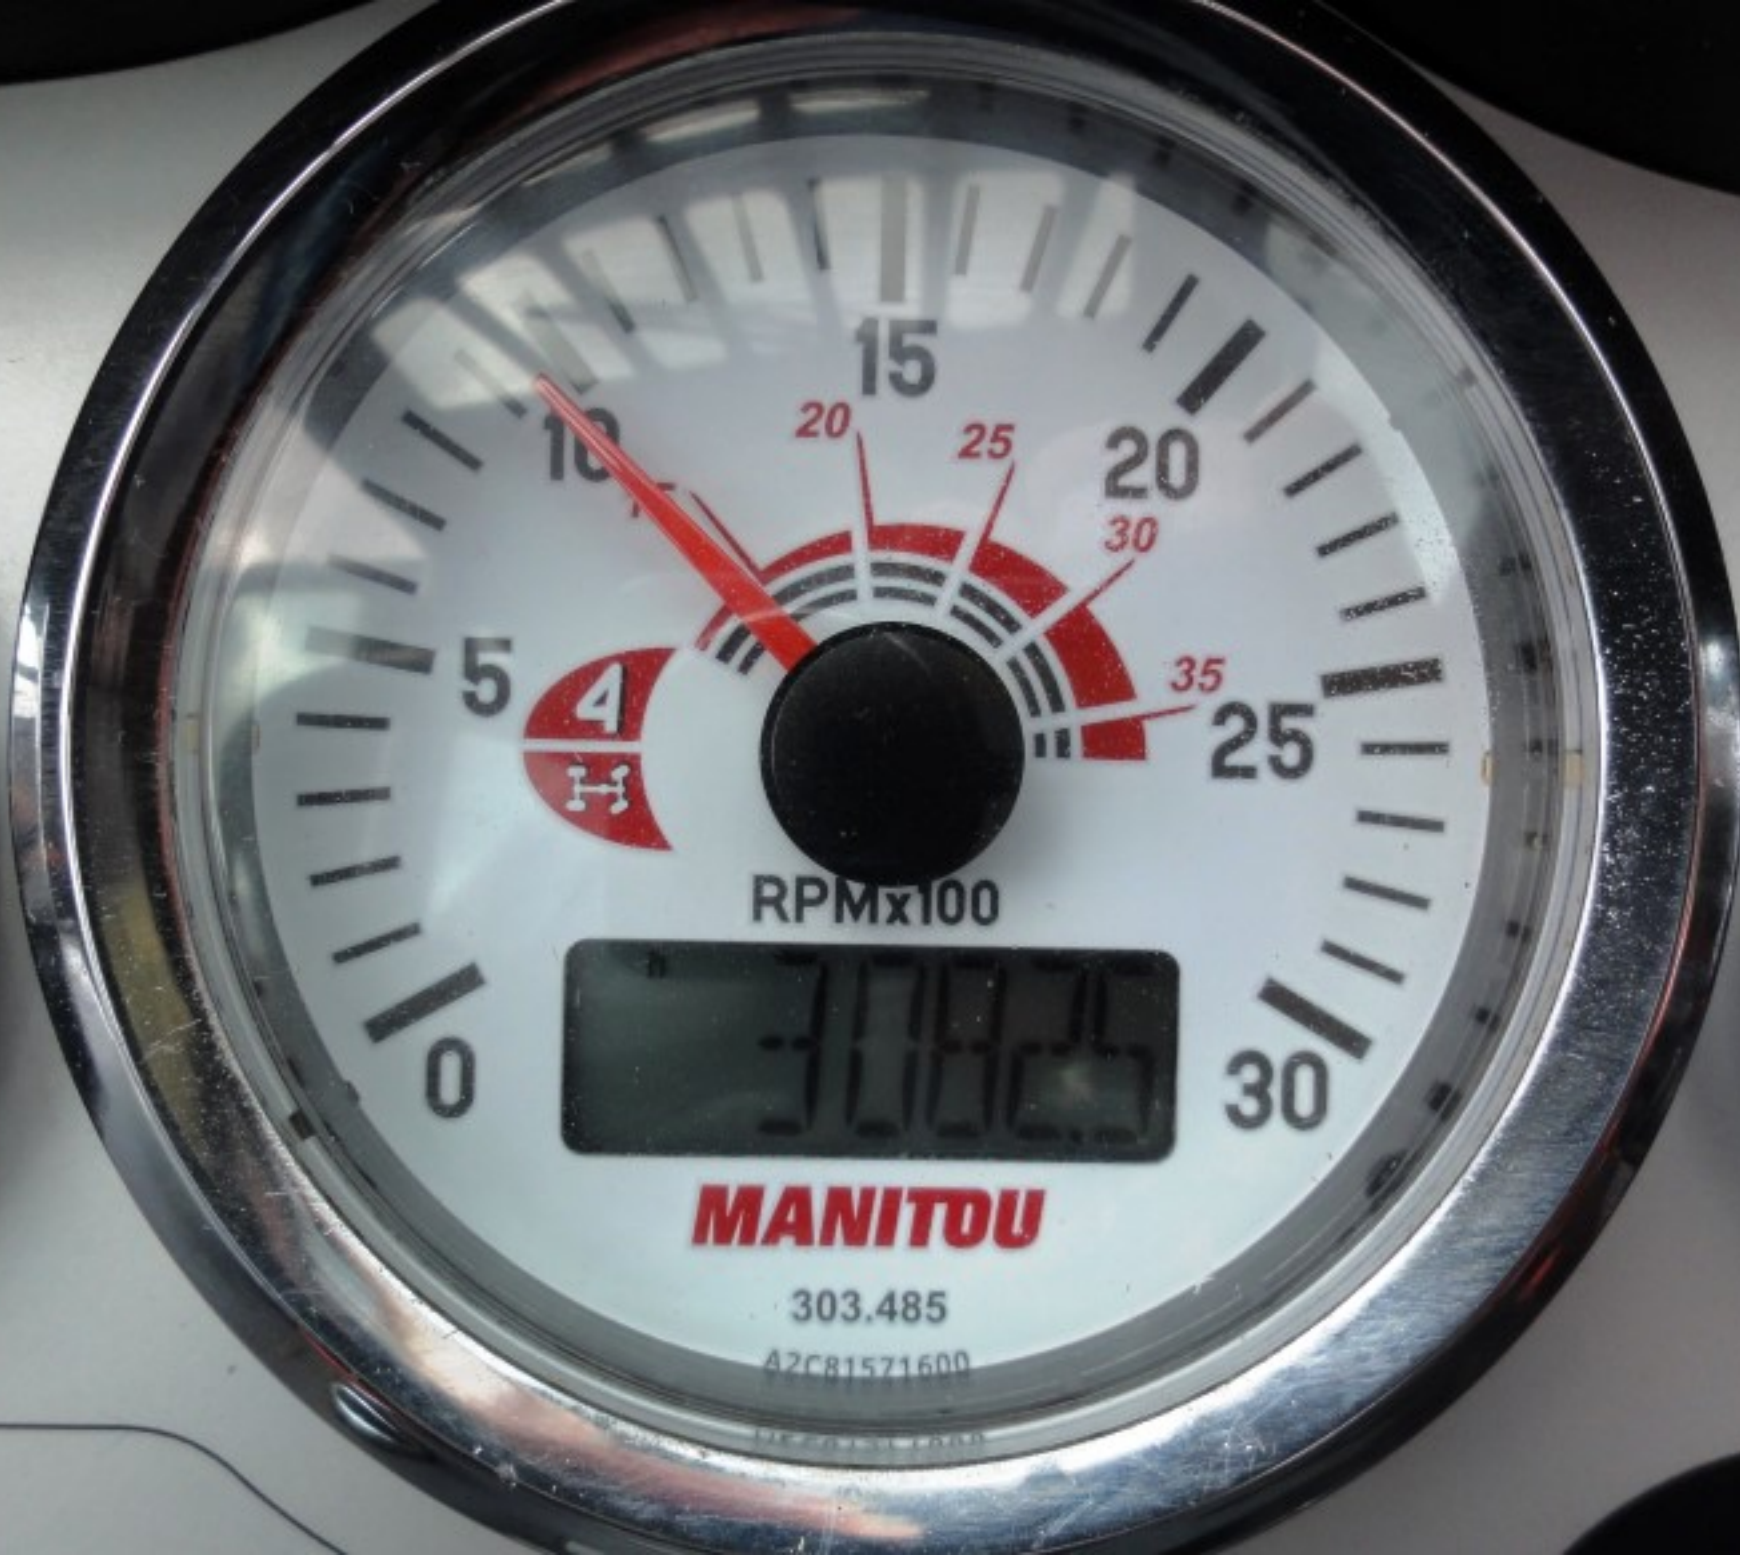



MANITOU

MANITOU BF 44158 ANCENIS CEDEX FRANCE



MODELE
MODEL

MODELLO
MODELO

MLT 634 120 LSU

SERIE
SERIES

SERIE
SERIE

G-E3

Année de fabrication
Year of manufacture

Anno di fabbricazione
Año de fabricación

2012

Année modèle
Model year

Anno modello
Año modelo

2012

N° de série
Serial Nr

N° di serie
N° de serie

916440

Puissance ISO/TR14396
Power ISO/TR14396
Potenza ISO/TR14396
Potencia ISO/TR14396

Masse à vide
Unladen mass

Massa a vuoto
Masa en vacío

7200

kg

91

kW

P.T.R.A.

Authorized gross vehicle weight

P.T.C.A.

P.T.R.A.

28000

daN

Capacité nominale
Rated capacity
Capacità nominale
Capacidad nominal

3400

kg

Effort de traction
Drag strain

Sforzo di trazione
Esfuerzo de tracción

7880

daN

Effort vertical maxi. (sur crochet de remorquage)
Maximum vertical force (on trailer hook)
Sforzo verticale massimo (sul gancio di traino)
Esfuerzo vertical máximo (sobre gancho de remolque)

1500

daN

Pression des pneumatiques (Bar)

Tyres pressure (Bar)

Pressione dei pneumatici (Bar)

Presión de los neumáticos (Bar)

Avant
Front

Antagore
Adelante

Arrière
Rear

Posteriore
Trasero

3.4

3.4

N° d'homologation

Homologation Nr

N° di omologazione

N° de homologación

N°295449



MANITOU

MANITOU	
MANITOU TELEHANDLER	
CE	
Model	
Serial	
Year	
Capacity	
Max. Lift	
Max. Reach	
Max. Height	
Max. Load	
Max. Wind	
Max. Speed	
Max. Tilt	
Max. Rotation	
Max. Traction	
Max. Braking	
Max. Steering	
Max. Turning	
Max. Lifting	
Max. Lowering	
Max. Stopping	
Max. Holding	
Max. Releasing	
Max. Locking	
Max. Unlocking	
Max. Opening	
Max. Closing	
Max. Loading	
Max. Unloading	
Max. Storing	
Max. Retrieving	
Max. Transporting	
Max. Disposing	
Max. Recycling	
Max. Reusing	
Max. Restoring	
Max. Repairing	
Max. Maintaining	
Max. Inspecting	
Max. Testing	
Max. Calibrating	
Max. Adjusting	
Max. Replacing	
Max. Refilling	
Max. Emptying	
Max. Filling	
Max. Draining	
Max. Flushing	
Max. Cleaning	
Max. Polishing	
Max. Waxing	
Max. Sealing	
Max. Unsealing	
Max. Gluing	
Max. Ungluing	
Max. Painting	
Max. Repainting	
Max. Coating	
Max. Uncoating	
Max. Etching	
Max. Unetching	
Max. Engraving	
Max. Unengraving	
Max. Marking	
Max. Unmarking	
Max. Labeling	
Max. Unlabeling	
Max. Stamping	
Max. Unstamping	
Max. Imprinting	
Max. Unimprinting	
Max. Stenciling	
Max. Unstenciling	
Max. Signaling	
Max. Unsignaling	
Max. Illuminating	
Max. Unilluminating	
Max. Heating	
Max. Unheating	
Max. Cooling	
Max. Uncooling	
Max. Drying	
Max. Undrying	
Max. Freezing	
Max. Unfreezing	
Max. Thawing	
Max. Unthawing	
Max. Melting	
Max. Unmelting	
Max. Solidifying	
Max. Unsolidifying	
Max. Crystallizing	
Max. Uncrystallizing	
Max. Sublimating	
Max. Unsublimating	
Max. Condensing	
Max. Uncondensing	
Max. Evaporating	
Max. Unevaporating	
Max. Boiling	
Max. Unboiling	
Max. Freezing	
Max. Unfreezing	
Max. Thawing	
Max. Unthawing	
Max. Melting	
Max. Unmelting	
Max. Solidifying	
Max. Unsolidifying	
Max. Crystallizing	
Max. Uncrystallizing	
Max. Sublimating	
Max. Unsublimating	
Max. Condensing	
Max. Uncondensing	
Max. Evaporating	
Max. Unevaporating	
Max. Boiling	
Max. Unboiling	

WA

ANSI B 56,6

N°193032

US PENDING

MANITOU

MANITOU BF - 44158 ANCENIS CEDEX FRANCE



Type / Type / Tipo / Tipo / Typ

P0150L

N° d'homologation / Homologation N° / N° di omologazione / N° de homologación / Homologationsnummer

e13*2003/37*0175*05

N° d'identification / Identification N° / N° d'identificazione / N° de identificación / Identifizierungsnummer

P0150L 916440

Masse totale admissible / Total permissible mass

Massa totale ammissibile / Peso total admisible / Zulässige Gesamtmasse

9150

kg

Masse maximale sur essieu AV / Maximum mass on front axle

Massa complessiva su assale anteriore / Peso máximo sobre eje delantero / Maximale Achslast vorne

2980

kg

Masse maximale sur essieu AR / Maximum mass on rear axle

Massa complessiva su assale posteriore / Peso máximo sobre eje trasero / Maximale Achslast hinten

6170

kg

MASSE REMORQUABLE ADMISSIBLE / PERMISSIBLE TOWABLE MASS
 MASSA RIMORCHIABILE AMMISSIBILE / PESO REMOLCABLE ADMISIBILE / ZULÄSSIGE ANHÄNGEMASSE

Masse remorquable non freinée

Towable mass with no braking

Massa rimorchiabile non frenata

Peso remolcable sin frenado

Nichtgebremsste Anhängemasse

1500

kg

Masse remorquable avec freinage indépendant

Towable mass with independent braking

Massa rimorchiabile con freno indipendente

Peso remolcable con frenado independiente

Anhängemasse mit unabhängiger Bremsung

3000

kg

Masse remorquable avec freinage à inertie

Towable mass with inertial braking

Massa rimorchiabile con freno inerziale

Peso remolcable con frenado de inercia

Anhängemasse bei Auflaufbremsung

6000

kg

Masse remorquable avec freinage assisté (Hydraulique ou pneumatique)

Towable mass with assisted braking (Hydraulic or pneumatic)

Massa rimorchiabile con servofreno (idraulico o pneumatico)

Peso remolcable con frenado asistido (hidráulico o neumático)

Anhängemasse bei Hilfskraftbremsung (hydraulisch oder pneumatisch)

20850

kg

N°283316

Cab Appro



MANITOU

MANITOU BF 44158 ANCENIS CEDEX FRANCE



MODELE
MODEL

MODELLO
MODELO

MLT 634 120 LSU

SERIE
SERIES

SERIE
SERIE

G-E3

Année de fabrication
Year of manufacture

Anno di fabbricazione
Año de fabricación

2012

Année modèle
Model year

Anno modello
Año modelo

2012

N° de série
Serial Nr.

N° di serie
N° de serie

916440

Puissance ISO/TR14396
Power ISO/TR14396
Potenzá ISO/TR14396
Potencia ISO/TR14396

91

kW

Masse à vide
Unladen mass

Massa a vuoto
Masa en vacío

7200

kg

P.T.R.A.

Authorized gross vehicle weight

P.T.C.A.

P.T.R.A.

28000

daN

Capacité nominale
Rated capacity
Capacità nominale
Capacidad nominal

3400

kg

Effort de traction
Drag strain

Sforzo di trazione
Esfuerzo de tracción

7880

daN

Effort vertical-maxi. (sur crochet de remorquage)
Maximum vertical force (on trailer hook)

Sforzo verticale massimo (sul gancio di traino)

Esfuerzo vertical máximo (sobre gancho de remolque)

1500

daN

Pression des pneumatiques (Bar)

Tyres pressure (Bar)

Pressione dei pneumatici (Bar)

Presión de los neumáticos (Bar)

Avant
Front

Anteriore
Adelante

Arrière
Rear

Posteriore
Trasero

3.4 / 3.4

N° d'homologation
Homologation Nr

N° di omologazione

N° de homologación

N°295449



GKN Walterscheid GmbH

NICHTSELBSTTÄTIGE ANHÄNGE KUPPLUNG

Typ/Ausf. KU540-4

NUR IN VERBINDUNG MIT ZUGÖSEN

DIN 11026, DIN 11043, DIN 74053 (ISO 1102), DIN 74054 (ISO 8755), DIN 9679 (ISO 1102)

NR. 4157148001



D

e1

0207

D-Wert 82,4 kN
S-Wert 2000 daN

DIE MONTAGE- UND BETRIEBSANLEITUNG IST ZU BEACHTEN!

