



Control panel area containing two joysticks, a gear selector, and various control buttons.

Black panel area containing a circular port on the left and a latch on the right.

Red metal tray area below the control panel.

Safety labels including CE, a warning triangle, and pictograms for safety instructions.

Black plastic case or component located at the bottom of the console.



MANTOU

165 ATJ

MANIACCESS

MANTOU

COPIC



MANITOU

MANI
TOU

165 AT
MANIACCESS

MANITOU

MANITOU

WEBER-Produktions.de







MANIFRESCO
ANTI-FREZZE
PROTEZIONE
ANTIRISCHIAFFATE
-40°C
-30°C
-20°C

SOFILTRA

MANIFRESCO
ANTI-FREZZE
PROTEZIONE
ANTIRISCHIAFFATE
-40°C
-30°C
-20°C




IMPORTANT ENGINE INFORMATION

510139
10M05-0185

Perkins

MHI 131019
OIL FILTER
PERKINS

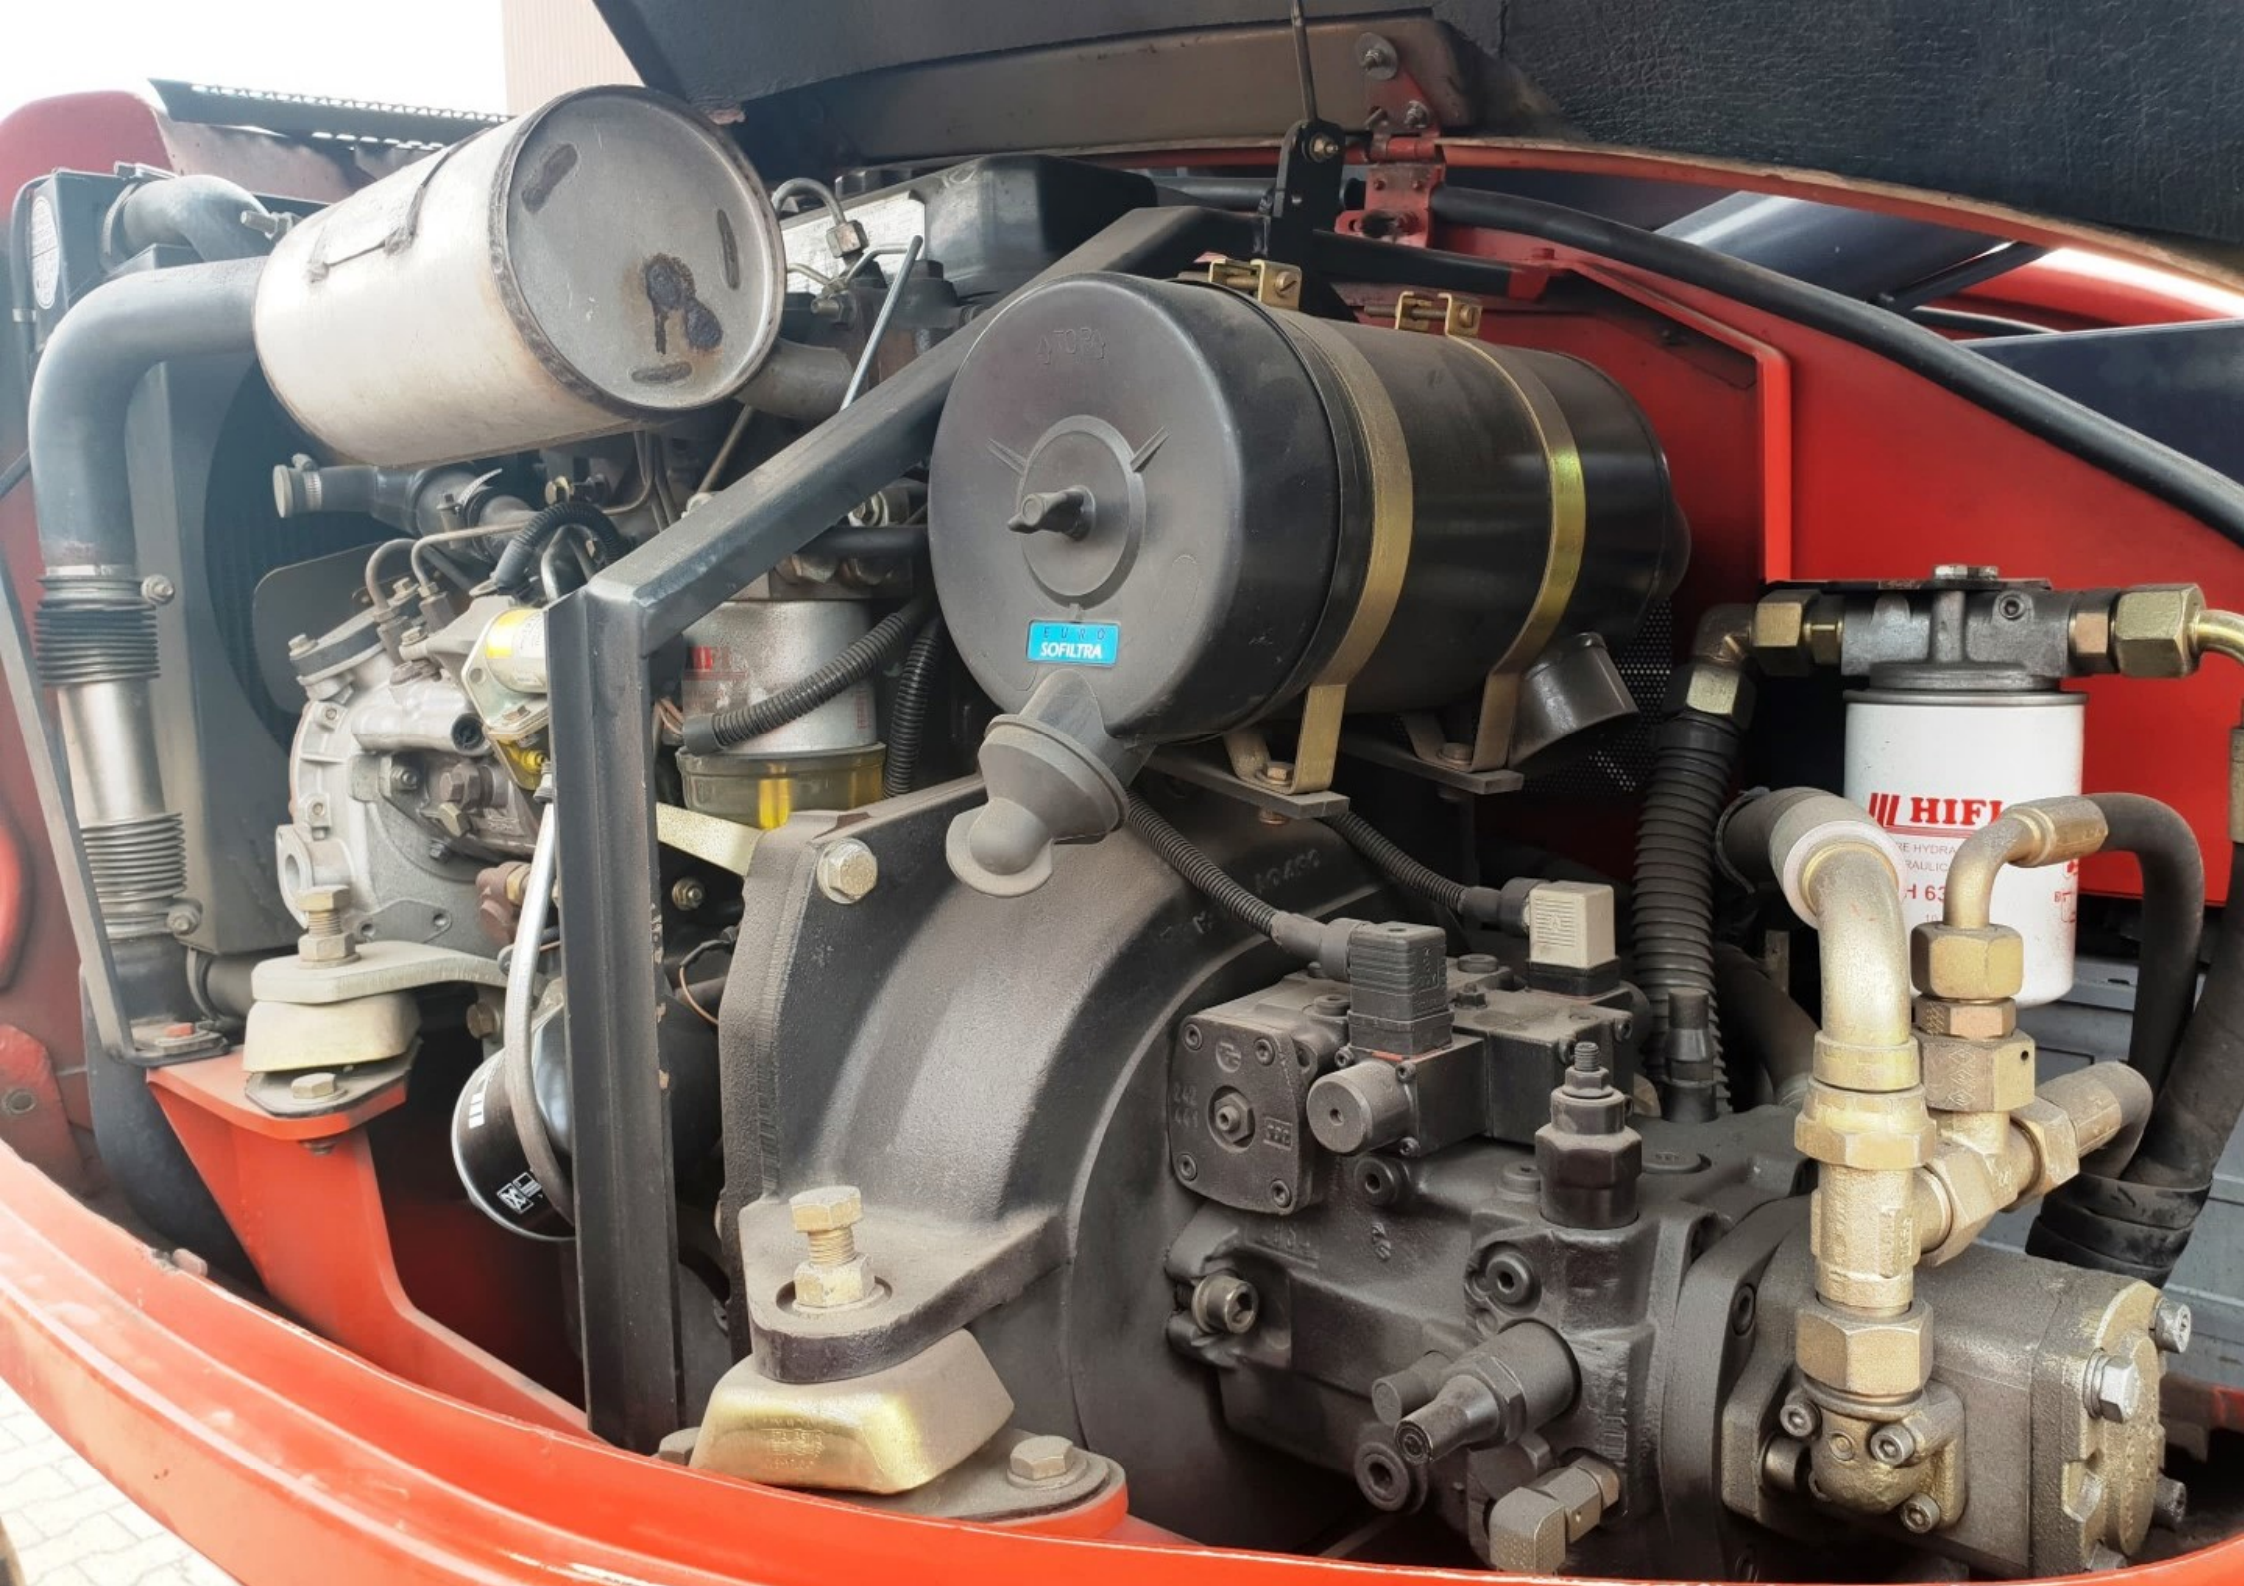

ATORA

SOFILTRA

HIFI

RE HYDRA
RAULIC
H 63

MANITEX
4118 ANCRON CRDEX
FRANCE

MODELLE	litri carburante max
N° della serie	Equipaggiamento
Anno di fabbricazione	Potenza nominale
Massa a vuoto	Velocità max di marcia
Potenza	Velocità max di lavoro
Versione	Versione di lavoro

N° 100000

The control panel features a central yellow button labeled "STOP" and two red buttons below it. To the left is a black knob labeled "LUC". Above the buttons are several indicator lights and symbols. To the right is a hydraulic schematic diagram showing a boom with various control points and arrows indicating movement directions. Below the panel is a yellow warning label with text in Italian and two warning symbols.

LUC

STOP

Warning Label:
Attenzione: il sistema idraulico è a pressione. Non toccare le parti in movimento o sotto tensione. Per informazioni, consultare il manuale di istruzioni. © 1998/1999

A complex hydraulic valve assembly with multiple ports and hoses connected to it. The assembly is mounted on a metal plate and is part of the machine's hydraulic system.



MANITO

44158 ANCENIS CEDEX
FRANCE

MODELE

165 ATJ

N° dans la série

503 599

Année de fabrication

2001

Masse à vide

8450 kg

Puissance

38 kW

Tension

12 VDC

Charge maxi

250 kg

Nb personnes maxi

2

Equipement

90 kg

Forces manuelles

40 daN

Inclinaison maxi

5°

Vitesse maxi du vent

12,5 m/s

Source électrique ext

Volts

N° 506935













MANTOU