









MANITOU

**M50-4
TURBO**

MANITOU



MANITOU

M50-4
TURBO



SK3310 1.8-HP



200 333

57
200 333





11000000



MANITOU

0 1 1 1 3 2 3



CAPACITES EFFECTIVES
 ACTUAL CAPACITIES
 EFFEKTIVE KAPAZITÄT
 CAPACIDAD EFECTIVA
 CAPACITÀ EFFETTIVA

SUIVANT NORME EN 1726-1 QUINQUE H



- 1 - Jusqu'à hauteur de levee
 Up to height of
 Bis zur hubhöhe
 Hasta altura de elevacion
 Sino ad altezza di sollevamento

mm

- 2 - Pour hauteur maximale de
 For maximum height of
 Für maximale Höhe
 Para altura máxima de
 Per altezza massima di

3700 mm

MAT VERTICAL
 VERTICAL MAST
 VERTIKALER MAST
 MASTIL VERTICAL
 RAMPA VERTICALE

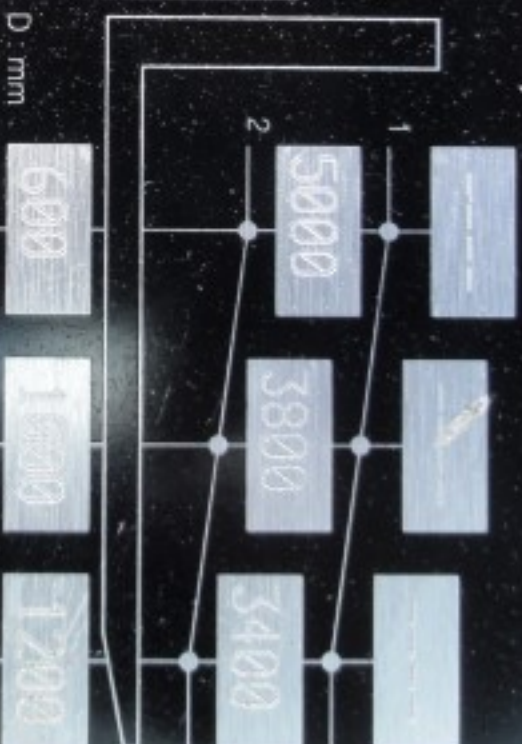

EQUIPEMENT
 ATTACHMENT
 ZUBEHÖR
 EQUIPO
 ATTREZZATURA

TDLA50N14R224	
TDLA50N14R200	

CAPACITES EFFECTIVES
 ACTUAL CAPACITIES
 EFFEKTIVE KAPAZITÄT
 CAPACIDAD EFECTIVA
 CAPACITÀ EFFETTIVA



n°:

239178

 **MANITOU**

CE

MANITOU BF 44158 ANCENIS
CEDEX FRANCE

SERIE

3-E3

TYP

N 50-4 T

Baujahr

2010

Seriennummer

590006

Zul. Gesamtgew

daN

Fz Ident. Nr.

1590006

Zul. Achslast vorn

daN

Tragkraft

5000 kg

Zul. Achslast hinten

daN

Leistung nach ISO/TR14396

70 kW

Zugkraft

10360 daN

Reifendruck (Bar)

Vorn 4.5 / Hinten 3.2

Maximale Zugkraft
(am Schlepphaken)

1500 daN

N°240797



XMC2
MICHELIN
MICHELIN
MICHELIN



340/80 R18 IND
(12.5/80 R18)

143

⚠ WARNING: SERIOUS INJURY MAY RESULT FROM EXPLOSION OF TIRE. NEVER EXCEED 55 PSI (250 KPa) WHEN SEATING B



18-22-5

© 1963 PR 63 AB

NYLON

(445/65-22.5)



18-2200
MITSUBISHI

MITSUBISHI

