





MANITOU

120 AETJ C³⁰

MANITOU



COMPACT

120 AETJ C³⁰

MANITOU



MANITOU

MANITOU

120





COMPACT
MANTIS
12 3

STOP



200 kg = 450 lb
440 Lbs = 200 kg
400 N
140 kg - IN LEDU
440 Lbs = 200 kg
1.25 m/s (4.5 MPH)



STOP

h

679972A




679885
429-05-18-47335

598636
735-05-18-47335

A grey control panel mounted on the red machine body. It features a row of five toggle switches at the top, a central gauge with a red needle, and a large yellow stop button with a red safety cap. Below the stop button are several indicator lights and a small red emergency stop button. The panel is secured with a red safety tag.

A dense arrangement of hydraulic hoses and electrical wires. The hoses are black with yellow and red markings, and are connected to various fittings and solenoid valves. Some hoses have labels such as "SAE 100R21" and "SAE 100R22". The wires are bundled together and some have yellow and black markings.



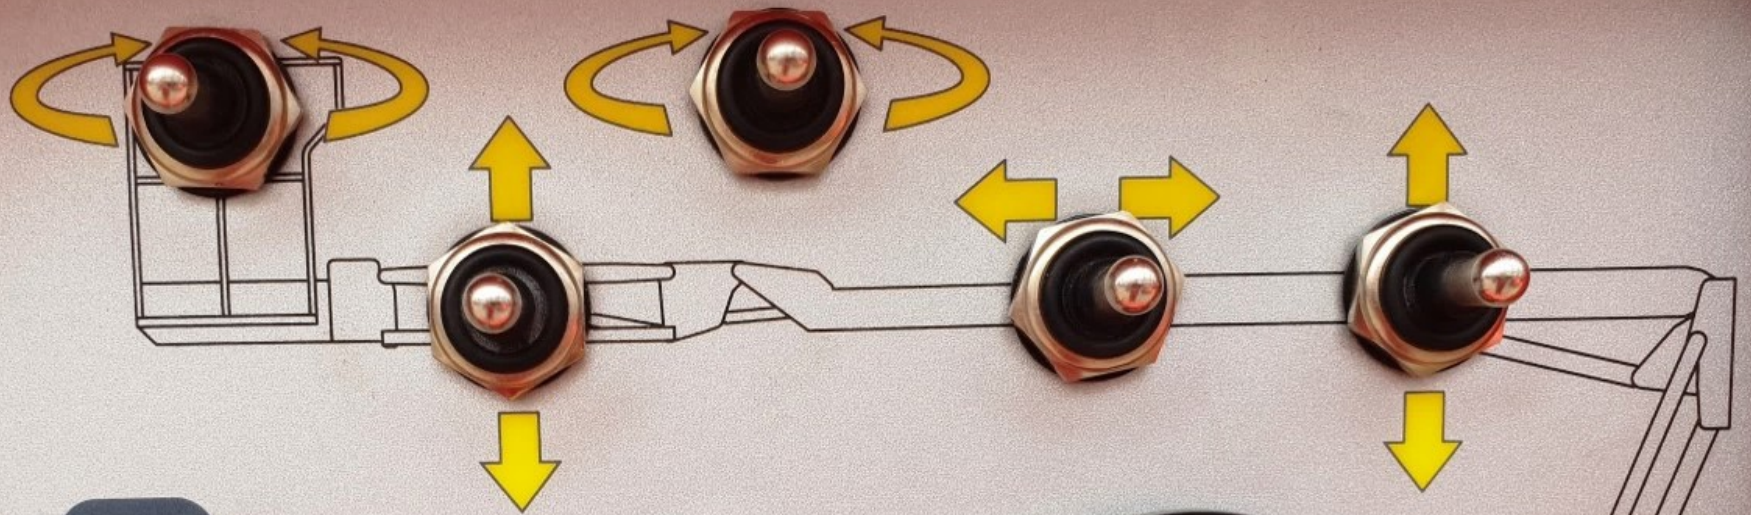

Three blue rectangular buttons with rounded ends. The first button features a white icon of a forklift. The second button features a white icon of an open book. The third button features a white battery symbol with a minus sign on the left and a plus sign on the right.

A blue rectangular button with rounded ends. On the left, there is a white icon of a key with a plus sign to its right. To the right of the text is a physical silver button with a black top.



Two physical buttons with silver stems. The top button has a white icon of a forklift and yellow arrows pointing up and down. The bottom button has a white icon of a truck and yellow curved arrows pointing left and right.

A yellow circular button with the word "STOP" in black. Below it is a silver lock with a key inserted. To the right of the lock is a white icon of a forklift.

A physical button with a silver stem and a black top. To its right is a white icon of a truck. Yellow curved arrows are positioned around the button.





