



3

CE

MANITOU

ME450

MANITOU

MANIACCESS

MANITOU

SECRET 11

MRT1200

MANITOU



ME450

MANITOU

MANITOU

MANITOU

MANITOU



8

CE

MANITOU
ME450

ME450

MANITOU



8

CE

ME450

MANITOU

MANITOU

066045





MANITOU

ME450

MANITOU



powered by
GNB
INDUSTRIAL POWER

ON
Basic
GNB
INDUSTRIAL POWER

X4





MANITOU BF
44158 ANCENIS CEDEX FRANCE



MODELE
MODEL

MODELLO
MODELO

SERIE
SERIES

SERIE
SERIE

N° de série
Serial Nr

N° di serie
N° de serie

ME450

S3

262477

Année de fabrication Anno di fabbricazione
Year of manufacture Año de fabricación

Année modèle Anno modello
Model year Año modelo

P.T.R.A.
Max. train weight

P.T.M.A.
P.T.M.A.

2018/12

2019

daN

Poids sans la batterie
Weight excluding battery
Peso senza la batteria
Peso sin la batería

Tension nominale
Nominal Voltage
Tensione nominale
Tensión nominal

N° d'homologation
Homologation Nr

N° di omologazione
N° de homologación

5320 kg

80 V

ME545106CA15610

Pression des pneumatiques (Bar)
Tyres pressure (Bar)
Pressione dei pneumatici (Bar)
Presión de los neumáticos (Bar)

Poids de la batterie minimum
Minimum weight of the battery
Peso della batteria minima
Peso de la batería mínima

Poids de la batterie maximum
Maximum weight of the battery
Peso della batteria massima
Peso de la batería máxima

Avant	Anteriore	Arrière	Posteriore
Front	Adelante	Rear	Trasero

1750 kg

2000 kg

N°52529862

CAPACITE NOMINALE
 RATED CAPACITY
 NENNKAPAZITÄT
 CAPACIDAD NOMINAL
 CAPACITÀ NOMINALE

5000

kg

CAPACITES EFFECTIVES
 ACTUAL CAPACITIES
 EFFEKTIVE KAPAZITÄT
 CAPACIDAD EFECTIVA
 CAPACITÀ EFFETTIVA

SUIVANT NORME ISO 3691-1 (ISO 22915-2)

1- Jusqu'à hauteur de levée

Up to height of

Bis zur hubhöhe

Hasra altura de elevación

Sino ad altezza di sollevamento

— mm

2- Pour hauteur maximale de

For maximum height of


Für maximale Höhe

Per altezza massima de

Per altezza massima di


3500 mm

MAT VERTICAL
 VERTICAL MAST
 VERTIKALER MAST
 MASTIL VERTICAL
 RAMPA VERTICALE



Q : kg

D : mm

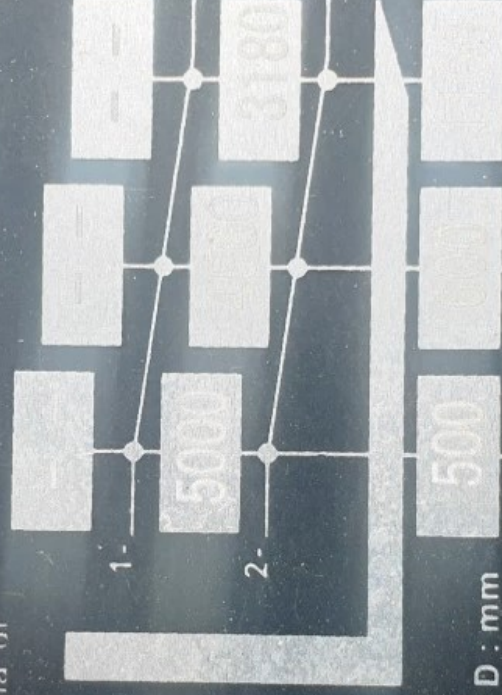

TABLIER INTEGRE

EQUIPEMENT

ATTACHMENT

ZUBEHÖR

EQUIPO

ATTREZZATURA

INTEGRATED SIDESHIFT

—

—

—

—

CAPACITES EFFECTIVES

ACTUAL CAPACITIES

EFFEKTIVE KAPAZITÄT

CAPACIDAD EFECTIVA

CAPACITÀ EFFETTIVA

— mm

— mm

5000 mm

4060 mm

3180 mm

n°

100% DRIVE SPEED
TOTAL TIME 2 h
T.ACS TIME 3 h
P.ACS TIME 4 h

