

STAGE V
CERTIFIED



X Series IC Forklift Truck

with capacities of 12,000 to 16,000kg



ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: 666 Xiangfu Road,
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755
Fax: +86-571-88926789 88132890

sales@hcforklift.com
www.hcforklift.com



Follow us on
Facebook



Follow us on
YouTube



Follow us on
WeChat



Download "Hangcha
Forklift" App



ISO14001
ISO14001:2015



ISO9001
ISO9001:2015



HANGCHA trucks conform
to the European Safety
Requirements.

2022 VERSION 2/COPYRIGHT 2022/05

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

The World of Hangcha



X SERIES IC FORKLIFT TRUCK

Professional industrial exterior design, high product recognition, compact and smooth modelling, modern industrial aesthetics. The concealed arrangement of exposed parts makes the exterior cleaner and neater.

The key parts of the old products have been verified to be reliable and durable by the market for many years, and with modular and standardized design, the main parts are verified step by step in advance, so that the vehicle is highly mature. Structural parts such as the frame, mast, etc. are upgraded and optimized on the basis of existing products, and are verified through CAE analysis and testing.

The degree of digitization is improved. With bus architecture and several built-in diagnosis and management functions, a central controller is added to the vehicle to enable a central fault alarm, simplified operations, easy diagnosis and flexible configuration of electrical functions.




STAGE V & TIER 4F

HANGCHA with you at every stage

Efficient, reliable solutions for your demands

With Hangcha you can meet all Stage V/Tier 4f emissions standards which provides customer demands for value, innovation and performance. The technologies include common rail fuel systems, Turbocharged Inter-cooled selective catalytic reduction (SCR), diesel oxidation catalysts (DOC) and diesel particulate filters (DPF). Designed and optimised to every engine model, our forklift truck maximises efficiency and reliability.

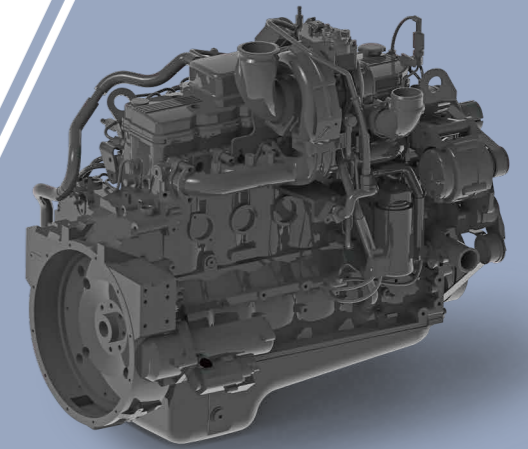

CUMMINS B6.7



OKAMURA gear box with micro-electronic control provides for two-shift power shifting, travelling is stable and accurate.



Optional imaging system with front and rear camera, increasing the safety greatly.



Thanks to the unique design, cab can be tilt without any tools, major service items can be reached easily by tilting the cabin, maximized access is possible.



Excellent all round visibility is achieved by the overall design.



Battery compartment is easy to open for easy maintenance.



The newly designed LCD instrument has more comprehensive functions and more stable performance. It can display the important information such as truck status and engine faults... So that the operator can understand the truck status more intuitively and facilitate maintenance.



Suspended seat with fingertip system that can be easily adjusted to suit each customer.



Heavy-duty traction axle, two-stage deceleration; Wet brake, maintenance-free; Hydraulic release spring action parking brake, safe and reliable.



Fully-suspended all-round vision cab

The new fully-suspended all-round vision cab (HPC) and optimized vehicle outline enable all-round sight and view. Performance of the air conditioner is improved to enable uniform conditioned air blowing from the air outlet and a strong cooling effect. The waterproof, dust-proof, heatproof, soundproof, noise-reducing sealing design improves driving comfort. The molded interior parts enable a more comfortable feel. The integral frame is constituted by profiled steel pipes. The structural parts have higher strength.



Comfort

The compact integral joystick enables accurate remote control. The optimized hydraulic braking curve enables smooth easy-to-control braking. The suspended seat and ergonomically-movable multidirectional adjustable console enable comfortable control.

High Performance

The configuration is improved. A new cab, wet braking drive axle, hydraulic adjustable fork, LCD bus instruments, cooling and heating air conditioner, vehicle LED lights, snail horn and reversing radar and other equipment are provided for the standard configuration. With reserved design, the optional equipment is greatly increased.

Performance is improved and the average operation efficiency is increased by more than 10%.

The overturnable cab, wide-opened hood, devices enable easy access to the oil and water, and the easy-to-dismount large electric control cover plate, make maintenance more convenient.



Comfort

The fully-suspended seat, ergonomic steering wheel and control platform make driving a pleasure.



Safety

A wide view reduces hidden safety hazards caused by blind corners when the vehicle is driving. A spindle and a hydraulic self-locking mechanism are used to connect the cab and the vehicle frame. When the electric or manual hydraulic pump is started, the hydraulic lock is automatically opened and at the same time, the hydraulic cylinder at the bottom of the cab sticks out so that the cab is flipped sideways over the center of gravity, improving the dimension. Safety and convenience of maintenance are improved.



Ergonomic Design

The steering wheel, joystick, control buttons, pedals and seat are all ergonomically designed for easier operation.



Overall Effect

The fully enclosed suspended cab has a curved front window that enables a large viewing angle and has its sides cut in a way different from that for the prior window. The cab doors are all glass, which increases the overall visual range. The exterior design of the whole vehicle is at the forefront of the development of forklift design. Being sturdy and elegant in appearance, the vehicle is practical and stylish. The integrated interior design is simple and comfortable, presenting visual enjoyment to the driver.



Standard Specification

- / Duplex wide-view mast
- / Hydraulic prong adjustment
- / Standard fork
- / Cab
- / Cooling and heating air conditioner
- / Fully hydraulic power steering
- / Quadruple multiway valve
- / Chair sensing system
- / Armrest's multi-directional adjustment device
- / Steering wheel adjusting device
- / Self-locking valve in the tilting fuel circuit
- / Speed limit valve in the lifting fuel circuit
- / High-position emission device
- / Traction device
- / Main power switch
- / Reversing radar
- / LCD bus instrument
- / Neutral indicator
- / Parking braking indicator
- / Charge indicator
- / Preheating indicator
- / Engine oil pressure alarm
- / Air filter alarm
- / Accumulator low pressure alarm
- / Hydraulic oil filter alarm
- / Oil-water separator alarm
- / Engine failure alarm
- / Vehicle LED lights
- / Water thermometer
- / Oil gauge
- / Oil temperature meter
- / Engine hour counter
- / Pneumatic tire
- / Reverse buzzer
- / Snail horn
- / Manual tipping pump
- / Vehicle toolkit
- / Cab fan



Options

- / User specified color
- / Forks of other specifications
- / Masts of other specifications
- / Solid tire
- / Vehicle intercom
- / Reverse voice buzzer
- / Electronic alarm light (with/without a control switch)
- / Rearview system (optionally with a memory)
- / Front and rear view systems (optionally with a memory, respectively)
- / Spark arrester
- / Fire extinguisher (2kg \ 4kg)
- / Automatic fire extinguisher
- / Mast LED operation light
- / Four-channel driving record system
- / Speed limit
- / Blue light
- / Weighing system
- / Air prefilter
- / Electrostatic belt
- / Electric tipping pump



X Series IC Forklift Truck 12-16t Specification

Distinguishing mark	HANGCHA GROUP CO.,LTD.														
	CPD120-XXRG57B	CPD120-XXRW25B	CPD120-XXRH13B	CPD140-XXRG57B	CPD140-XXRW25B	CPD140-XXRH13B	CPD160-XXRG57B	CPD160-XXRW25B	CPD160-XXRH13B	CPD160-XXRMG57B	CPD160-XXRMW25B	CPD160-XXRMH13B			
1.1	Manufacturer														
1.2	Manufacturer's type designation														
1.3	Drive: electric (battery or mains), diesel, petrol, fuel gas														
1.4	Operator type: hand, pedestrian, standing, seated, order-picker														
1.5	Rated capacity/rated load	Q (kg)	12000	12000	12000	14000	14000	14000	16000	16000	16000	16000	16000		
1.6	Load centre distance	c (mm)	600	600	600	600	600	600	600	600	750	750	750		
1.8	Load distance, centre of drive axle to fork	x (mm)	745	745	745	825	825	825	825	825	880	880	880		
1.9	Wheelbase	y (mm)	3100	3100	3100	3100	3100	3100	3100	3100	3300	3300	3300		
Weight	2.1	Service Weight	kg	16000	16000	16000	18200	18200	18200	19200	19200	19200	20300	20300	20300
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane													
	3.2	Tyre size, front													
	3.3	Tyre size, rear													
	3.5	Wheels, number front / rear (x = driven wheels)													
	3.6	Tread, front													
	3.7	Tread, rear													
	3.8	Tread, rear													
Dimensions	4.1	Tilt of mast/fork carriage forward/backward													
	4.2	Height, mast lowered													
	4.3	Free lift													
	4.4	Lift													
	4.5	Height, mast extended													
	4.7	Height of overhead cabin													
	4.8	Seat height relating to SIP													
	4.12	Coupling height													
	4.19	Overall length													
	4.20	Length to face of forks													
	4.21	Overall width													
	4.22	Fork dimensions													
	4.24	Fork-carriage width													
	4.25	Distance between fork-arms													
	4.31	Ground clearance, laden, below mast													
	4.32	Ground clearance, centre of wheelbase													
	4.34.1	Aisle width with load length 1500mm													
	4.34.2	Aisle width with load length 1800mm													
	4.35	Turning radius													
	4.36	Minimum pivoting point distance													
	Performance data	5.1	Travel speed, laden/unladen												
5.2		Lift speed, laden/unladen													
5.3		Lowering speed, laden/unladen													
5.5		Drawbar pull, laden/unladen													
5.7		Gradeability, laden/unladen													
5.10		Service brake													
		Parking brake													
Combustion-engine	7.1	Engine manufacturer/type													
	7.2	Engine power													
	7.3	Rated speed													
	7.4	Number of cylinders/displacement													
		Emission Std.													
	7.9	Vehicle electrical system voltage													
	7.10	Battery voltage/nominal capacity													
		Rated torque													
		Transmissions Manufacturer													
		Transmissions Type													
Addition data	10.1	Operating pressure for attachments													
	10.2	Oil volume for attachments													
	10.3	Hydraulic Tank - capacity (drain & refill)													
	10.4	Fuel tank capacity													
	10.7	Sound pressure level at the driver's seat													

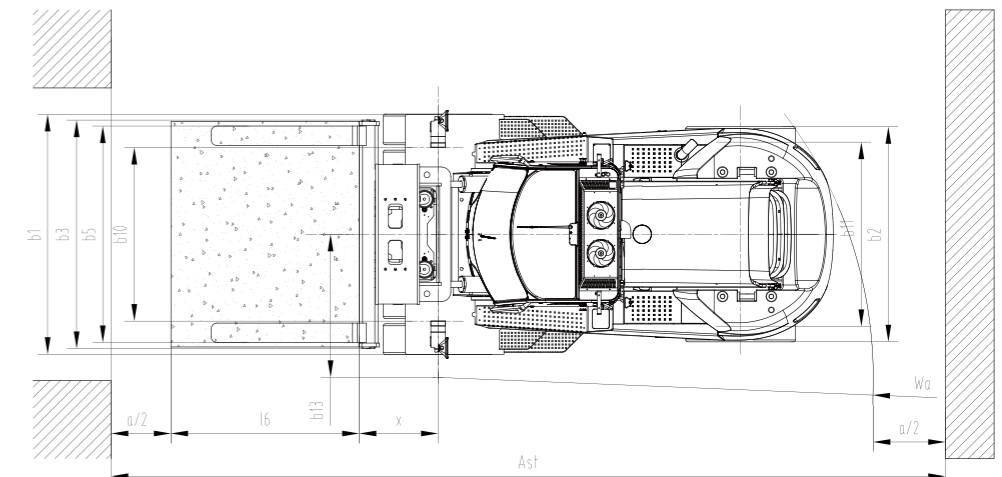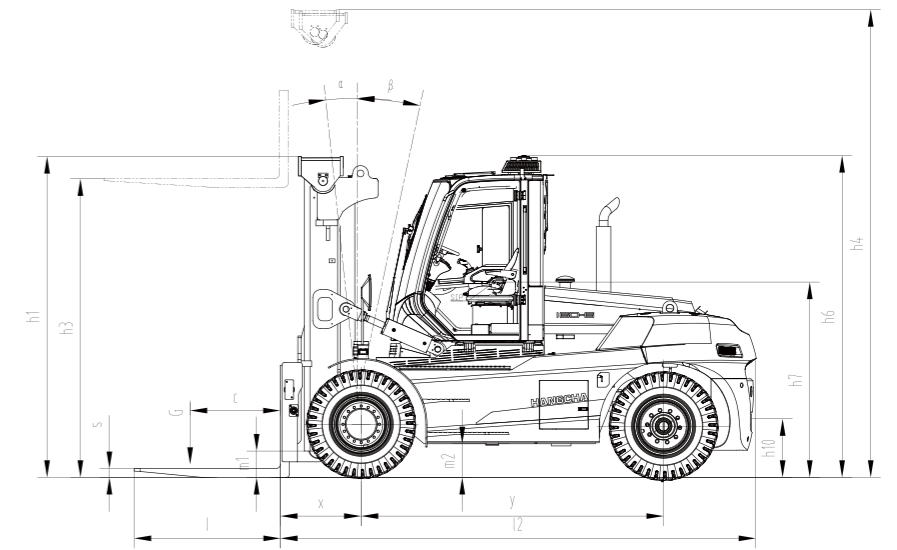

X Series IC Forklift Truck 12-16t Mast:(Pneumatic)

Type	Model	Max. fork height	Overall height				Tilt Range	Capacity			
			Lowered		Extended			Load capacity at 600mm		Load capacity at 750mm	
			12t	14t/16t	12t	14t/16t		12t	14t	16t	16t
Wide view mast	GXR120/160/161M300	3000	3180	3290	4695	4790	6/12	12000	14000	16000	16000
	GXR120/160/161M330	3300	3330	3440	4995	5090	6/12	12000	14000	16000	16000
	GXR120/160/161M360	3600	3480	3590	5295	5390	6/12	12000	14000	16000	16000
	GXR120/160/161M400	4000	3680	3790	5695	5790	6/12	12000	14000	16000	16000
	GXR120/160/161M430	4300	3880	3990	6030	6140	6/12	12000	14000	16000	16000
	GXR120/160/161M450	4500	3980	4090	6230	6340	6/12	12000	14000	16000	16000
	GXR120/160/161M480	4800	4130	4240	6530	6640	6/6	12000	14000	16000	16000
	GXR120/160/161M500	5000	4230	4340	6730	6840	6/6	12000	14000	16000	16000
	GXR120/160/161M550	5500	4530	4640	7280	7390	3/6	10500	12500	14500	14500
	GXR120/160/161M600	6000	4780	4890	7780	7890	3/6	9000	11000	13000	13000
GXR120/160/161M650	6500	5080	5190	8330	8440	3/6	7500	9500	11500	11500	

