

MAX-8



MAX-8

Excellent Performances & Reliability

CPC(Q)D15/18/
20/25/30/35T8

T8 series 1.5–3.5t forklift

EP EQUIPMENT CO.,LTD
www.ep-ep.com



CPC(Q)D15/18T8

T8 series 1.5-1.8t forklift specification

General		EP			
1	Manufacturer	CPCD15T8-S4Q 2	CPCD15T8-NB485BPG	CPQD15T8-GK21	CPQD18T8-GK21
2	Model	Diesel	Diesel	Gasoline	Gasoline
3	Power type	1500	1500	1500	1800
4	Rated capacity	kg	kg	kg	kg
5	Load center	mm	500	500	500
6	Lift height	mm	3000	3000	3000
7	Free lift height	mm	120	120	120
8	Fork size	L×W×T	920×100×35	920×100×35	920×100×35
9	Mast tilt range	F/R	6/12	6/12	6/12
10	Fork overhang(wheel center to fork face)	mm	420	420	420
11	Rear overhang	mm	420	420	420
12	Length to face of fork	mm	2230	2230	2230
13	Overall width	mm	1080	1080	1080
14	Mast lowered height	mm	1985	1985	1985
15	Mast extended height	mm	3960	3960	3960
16	Overhead guard height	mm	2070	2070	2070
17	Turning radius(outside)	mm	1995	1995	2035
18	Min.right angle stacking aisle width (Add load length and clearance)	mm	2400	2400	2440
19	Travel (No load)	Km/h	14	14	14
20	Speed	mm/sec	460	460	460
21	Lifting (Full load)	mm/sec	450	450	450
22	Lowering (Full load)	mm/sec	450	450	450
23	Max.Drawbar Pull (Full load)	N	20500(17500)	20500(17500)	20500(17500)
24	Max.Gradeability (Full load)	%	20	20	20
25	Tyres	mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
26	Tread	mm	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR
27	Wheelbase	mm	920	920	920
28	Ground clearance	mm	1430	1430	1430
29	Wheelbase center	mm	110	110	110
30	Self weight	kg	145	145	145
31	Weight	kg	2700	2700	2900
32	Weight Distribution	Front/Rear	3570/630	3570/630	3985/705
33	Weight Distribution	Front/Rear	1215/1485	1215/1485	1305/1595
34	Battery	V/AH	12/60	12/60	12/60
35	Voltage/Capacity(20HR)	Model	S4Q2	S4Q2	S4Q2
36	Manufacture	Manufacture	Mitsubishi	Mitsubishi	Mitsubishi
37	Rated output/p.m	Rated output/p.m	32.9/2500	32.9/2500	30/2600
38	Rated torque/p.m	Rated torque/p.m	131/1800	131/1800	131/1800
39	No.of cylinder	No.of cylinder	4	4	4
40	Bore×Stroke	Bore×Stroke	88×103	88×103	88×103
41	Displacement	Displacement	2505	2505	2270
42	Fuel tank capacity	L	50	50	50
43	Manufacture	Manufacture	CHINA	CHINA	CHINA
44	Type	Type	Powershift	Powershift	Powershift
45	Stage	Stage	1/1	1/1	1/1
46	Operating pressure	Mpa	17.5	17.5	17.5
47	For attachments	For attachments			
48					

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m, Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

2. Attachment available.

CPC(Q)D20/25T8

T8 series 2.0-2.5t forklift specification

		EP											
General		CPCD30TB-S4S	CPCD30TB-C490	CPCD30TB-A498	CPCD30TB-C240	CPCD30TB-TD27	CPCD30TB-GK25	CPCD30TB-S4S	CPCD30TB-A498	CPCD30TB-TD27	CPCD30TB-GK25	Diesel	Gasoline
1	Manufacture												
2	Model												
3	Power type	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Gasoline
4	Rated capacity	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3500
5	Load center	500	500	500	500	500	500	500	500	500	500	500	500
6	Lift height	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
7	Free lift height	120	120	120	120	120	120	120	120	120	120	120	120
8	Fork size	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×50
9	Mast lift range	F/R	F/R	F/R	F/R	F/R	F/R	F/R	F/R	F/R	F/R	F/R	F/R
10	Fork orienting(wheel center to fork face)	mm	612	612	612	612	612	612	612	612	612	612	612
11	Rear overhang	mm	481	481	481	481	481	481	481	481	481	481	486
12	Length to face of fork	mm	590	590	590	590	590	590	590	590	590	590	590
13	Overall width	mm	2762	2762	2762	2762	2762	2762	2762	2762	2762	2762	2822
14	Overall dimensions	mm	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
15	Mast lowered height	mm	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070
16	Mast extended height	mm	4210	4210	4210	4210	4210	4210	4210	4210	4210	4210	4210
17	Overhead guard height	mm	2180	2180	2180	2180	2180	2180	2180	2180	2180	2180	2180
18	Turning radius(outside)	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2510
19	Min.right angle stacking aisle width (Add load length and clearance)	mm	2950	2950	2950	2950	2950	2950	2950	2950	2950	2950	3010
20	Travel (No load)	Km/h	20	20	20	20	20	20	20	20	20	20	20
21	Speed	mm/sec	400	400	400	400	400	400	400	400	400	400	400
22	Max.Drawbar Pull (Full load)	mm/sec	400	400	400	400	400	400	400	400	400	400	400
23	Max.Gradeability (Full load)	N	21000	21000	21000	21000	21000	21000	21000	21000	21000	21000	21500
24	Types	mm	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR
25	Rear	mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
26	Front	mm	1010	1010	1010	1010	1010	1010	1010	1010	1010	1010	1010
27	Rear	mm	980	980	980	980	980	980	980	980	980	980	980
28	Wheelbase	mm	1700	1700	1700	1700	1700	1700	1700	1700	1700	1700	1760
29	Lowest	mm	140	140	140	140	140	140	140	140	140	140	140
30	Wheelbase center	mm	175	175	175	175	175	175	175	175	175	175	175
31	Self weight	Kg	4450	4450	4450	4450	4450	4450	4450	4450	4450	4450	4700
32	Full load		6488	6488	6488	6488	6488	6488	6488	6488	6488	6488	7134
33	Rear		962	962	962	962	962	962	962	962	962	962	1066
34	Front		1810	1810	1810	1810	1810	1810	1810	1810	1810	1810	1927
35	Rear		2640	2640	2640	2640	2640	2640	2640	2640	2640	2640	2773
36	Battery	V/AH	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60
37	Modal		S4S-DPEU2	C490BFG-25	A498BT1-39	C240	TD27	GK25	A498BT1-39	TD27	GK25	GCT	GCT
38	Manufacture		Mitsubishi	CHINA	ISUZU	CHINA	ISUZU	GCT	Mitsubishi	CHINA	Mitsubishi	CHINA	GCT
39	Rated output/r.p.m	kw	35.3/2250	36.8/2650	36.8/2650	36.8/2650	36.8/2650	36.8/2650	36.8/2650	36.8/2650	36.8/2650	36.8/2650	37.4/2300
40	Rated torque/r.p.m	N.m	177/1700	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	156/1700-1900	176.5/1600
41	No. of cylinder		4	4	4	4	4	4	4	4	4	4	4
42	Bore×Stroke	mm	94×120	90×105	96×105	88×102	88×102	88×102	88×102	88×102	88×102	88×102	88×102
43	Displacement	cc	3331	2670	2680	2369	2369	2369	2369	2369	2369	2369	2488
44	Fuel tank capacity	L	70	60	60	70	70	70	70	70	70	70	60
45	Manufacture		CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
46	Type		Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
47	Stage		1/1	2/2	2/2	1/1	1/1	1/1	1/1	1/1	1/1	1/1	1/1
48	Operating pressure	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m, Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

2. Attachment available.

CPC(Q)D30/35T8







T8 series 3.0-3.5t forklift specification

		EP									
1	Manufacture	CPCD20T8-S4S	CP-CD20T8-C49Q	CPD20T8-GK2S	CPD20T8-TD27	CPD20T8-S4S	CPD20T8-C24Q	CPD20T8-S4S	CPD20T8-C24Q	CPD20T8-TD27	CPD20T8-GK2S
2	Model	Diesel	Diesel	Gasoline	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Gasoline
3	Power type	2000	2000	2000	2000	2000	2000	2000	2000	2000	2500
4	Rated capacity	500	500	500	500	500	500	500	500	500	2500
5	Load center	mm	mm	mm	mm	mm	mm	mm	mm	mm	500
6	Lift height	mm	mm	mm	mm	mm	mm	mm	mm	mm	3000
7	Free lift height	mm	mm	mm	mm	mm	mm	mm	mm	mm	3000
8	Fork size	LxWxT	1070x120x40	1070x120x40	1070x120x40	1070x120x40	1070x120x40	1070x120x40	1070x120x40	1070x120x40	1070x120x40
9	Mast tilt range	deg	612	612	612	612	612	612	612	612	612
10	Fork overhang(wheel center to fork face)	mm	476	476	476	476	476	476	476	476	476
11	Rear overhang	mm	485	485	485	485	485	485	485	485	550
12	Length to face of fork	mm	2610	2610	2610	2610	2610	2610	2610	2610	2660
13	Overall width	mm	1150	1150	1150	1150	1150	1150	1150	1150	1150
14	Mast lowered height	mm	2050	2050	2050	2050	2050	2050	2050	2050	2050
15	Mast extended height	mm	4200	4200	4200	4200	4200	4200	4200	4200	4200
16	Overhead guard height	mm	2130	2130	2130	2130	2130	2130	2130	2130	2130
17	Turning radius(outside)	mm	2170	2170	2170	2170	2170	2170	2170	2170	2230
18	Min right angle stacking aisle width (Add load length and clearance)	mm	2680	2680	2680	2680	2680	2680	2680	2680	2740
19	Travel (No load)	Km/h	20	20	20	20	20	20	20	20	20
20	Speed	mm/sec	450	450	450	450	450	450	450	450	450
21	Lifting (Full load)	mm/sec	450	450	450	450	450	450	450	450	450
22	Max Drawbar Pull (Full load)	N	17500	17500	17500	17500	17500	17500	17500	17500	17500
23	Max Gradeability (Full load)	%	20	20	20	20	20	20	20	20	20
24	Tyres	Front	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR
25		Rear	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR
26	Tread	Front	970	970	970	970	970	970	970	970	970
27		Rear	970	970	970	970	970	970	970	970	970
28	Wheelbase	mm	1600	1600	1600	1600	1600	1600	1600	1600	1600
29	Ground	mm	120	120	120	120	120	120	120	120	120
30	Clearance	mm	145	145	145	145	145	145	145	145	145
31	Self weight	Kg	3580	3580	3580	3580	3580	3580	3580	3580	3920
32	Weight	Front	4856	4856	4856	4856	4856	4856	4856	4856	5588
33		Rear	724	724	724	724	724	724	724	724	832
34	Distribution	Front	1428	1428	1428	1428	1428	1428	1428	1428	1560
35		Rear	2152	2142	2142	2142	2142	2142	2142	2142	2360
36	Battery	V/AH	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60
37	Model		SAS-DPEU2	CH40BPG-25	C24Q	TD27	GK25	CH40BPG-25	C24Q	TD27	GK25
38	Manufacture		Mitsubishi	CHINA	ISUZU	GCT	CHINA	CHINA	ISUZU	GCT	GCT
39	Rated output/p.m	kw	35.3/2250	36.8/2650	34.5/2500	38.5/2300	37.4/2300	36.8/2650	35.3/2250	38.5/2300	37.4/2300
40	Rated torque/p.m	N.m	1771/1700	156/1700-1900	139/1800	160/2300	176.5/1600	156/1700-1900	139/1800	160/2300	176.5/1600
41	No. of cylinder		4	4	4	4	4	4	4	4	4
42	Bore×Stroke	mm	94×100	90×105	86×102	96/92	89×100	96×100	86×102	96/92	89×100
43	Displacement	cc	3331	2670	2369	2663	2488	2369	2670	2663	2488
44	Fuel tank capacity	L	60	60	60	60	60	60	60	60	60
45	Manufacture		CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
46	Transmissions	Type	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift	Powershift
47	Stage		1/1	2/2	1/1	1/1	1/1	1/1	2/2	1/1	1/1
48	Operating pressure	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m, 3.3m, 3.5m, 3.6m, 3.7m, 4m, 4.3m, 4.5m, 5m. Full Free Duplex Mast 3.0m, 3.3m, 3.5m, 3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

2. Attachment available.

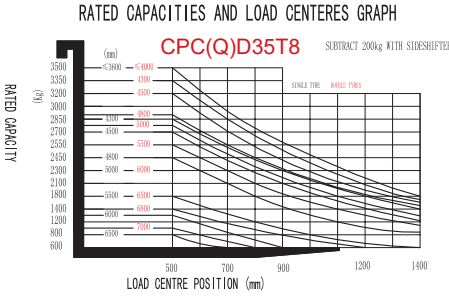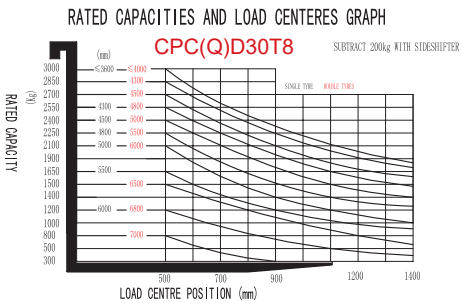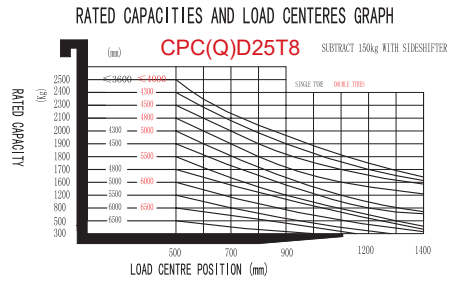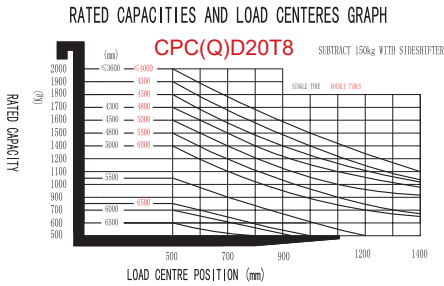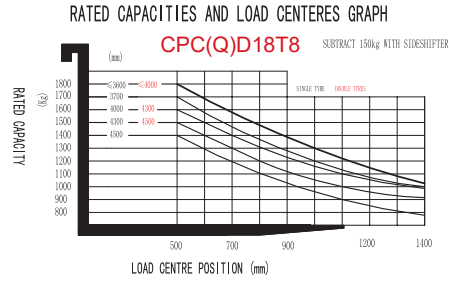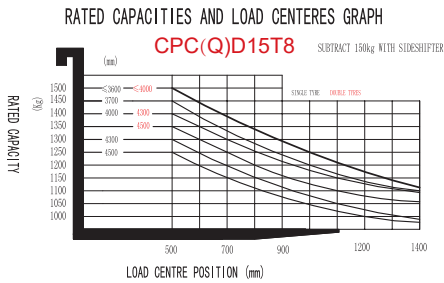

Option

Options	15/18T8	20/25T8	30T8	35T8
1 Fork length	○	○	○	○
2 Fork extension	○	○	○	○
3 Folded fork	○	○	○	○
4 Imported diesel engine	○	○	○	○
5 Import Gasoline Engine	○	○	○	○
6 LPG system	○	○	○	○
7 High exhaust	○	○	○	○
8 Dual air cleaners or special air cleaner	○	○	○	○
9 Solid rubber tire	○	○	○	○
10 No marking solid tire	○	○	○	○
11 Overhead guard	●	●	●	●
12 Mast options	○	○	○	○
13 Attachments	○	○	○	○
14 Integrated side shift	○	○	○	○
15 Cockpit	●	●	●	●
16 heater	○	○	○	○
17 Front windshield with wiper	○	○	○	○
18 Rear windshield with wiper	○	○	○	○
19 Fan	○	○	○	○
20 Full steel cabin room	○	○	○	○
21 LED front light	●	●	●	●
22 Rear working LED light	○	○	○	○
23 Fire extinguisher	○	○	○	○
24 Suspension seat	○	○	○	○
25 Seat switch	●	●	●	●
26 Warning light	●	●	●	●
27 Insulation mat	○	○	○	○
28 Double front tyre	○	○	○	○
29 OPS system	○	○	○	○

Note: ● standard ○ option — NA

